

BASIC Series Air Circulator

Provided with oscillating mechanism for horizontal swing adjustment.

- Available in 500, 650 and 750mm. Wall Mounted, Pedestal with rod & base and Wall Mounted with 1.1m cable & control box
- For stand fans, fixed (A) and adjustable (B) stand tubes are available
- For wall fan, normal (A) and safety (B) guards are available
- Fan motor has a totally enclosed construction with dust seals, class E installation, capacitor start and run
- Fan blade is made of aluminum and fully balanced, the guard is a closely meshed, epoxy powder coated wire
- Fan speed is adjustable by 3-speed and off regulator and is equipped with height adjustable mechanism and supported by a strong base. Wall fan, it is equipped with wall mount kit
- Product design according to BSEN 60335-2-80



FS65-A/B



FW65-B



EASTERN ELECTRIC
FAN EQUIPMENT

TECHNICAL PERFORMANCE


	500 mm		
Position	LOW	MEDIUM	HIGH
Fan Speed (RPM)	1200	1300	1360
Airflow (MCH)	5200	5800	6500
Noise Level (dBA)	56	59	68
Power (W)	115	135	160
Current (A)	0.5	0.58	0.65

	650 mm		
Position	LOW	MEDIUM	HIGH
Fan Speed (RPM)	1180	1280	1360
Airflow (MCH)	5400	5900	6300
Noise Level (dBA)	56	61	70
Power (W)	145	160	180
Current (A)	0.68	0.7	0.72

	750 mm		
Position	LOW	MEDIUM	HIGH
Fan Speed (RPM)	1180	1280	1360
Airflow (MCH)	8500	9000	9540
Noise Level (dBA)	58	62	73
Power (W)	150	180	220
Current (A)	0.68	0.71	0.72

	A	B (Max)	B (Min)	C	D
FS50-A	570	1050	----	330	560
FS50-B	570	1050	1050	330	560
FS65-A	710	1200	----	340	645
FS65-B	710	1500	1200	340	645
FS75-A	810	1500	----	340	645
FS75-B	810	1500	1200	340	645

	A	B	C	D	E	F	N-ØJ
FW50-A/B	570	730	500	190	113	113	3-Ø13
FW65-A/B	710	870	510	190	113	113	3-Ø13
FW75-B	810	920	510	190	124	102	3-Ø13

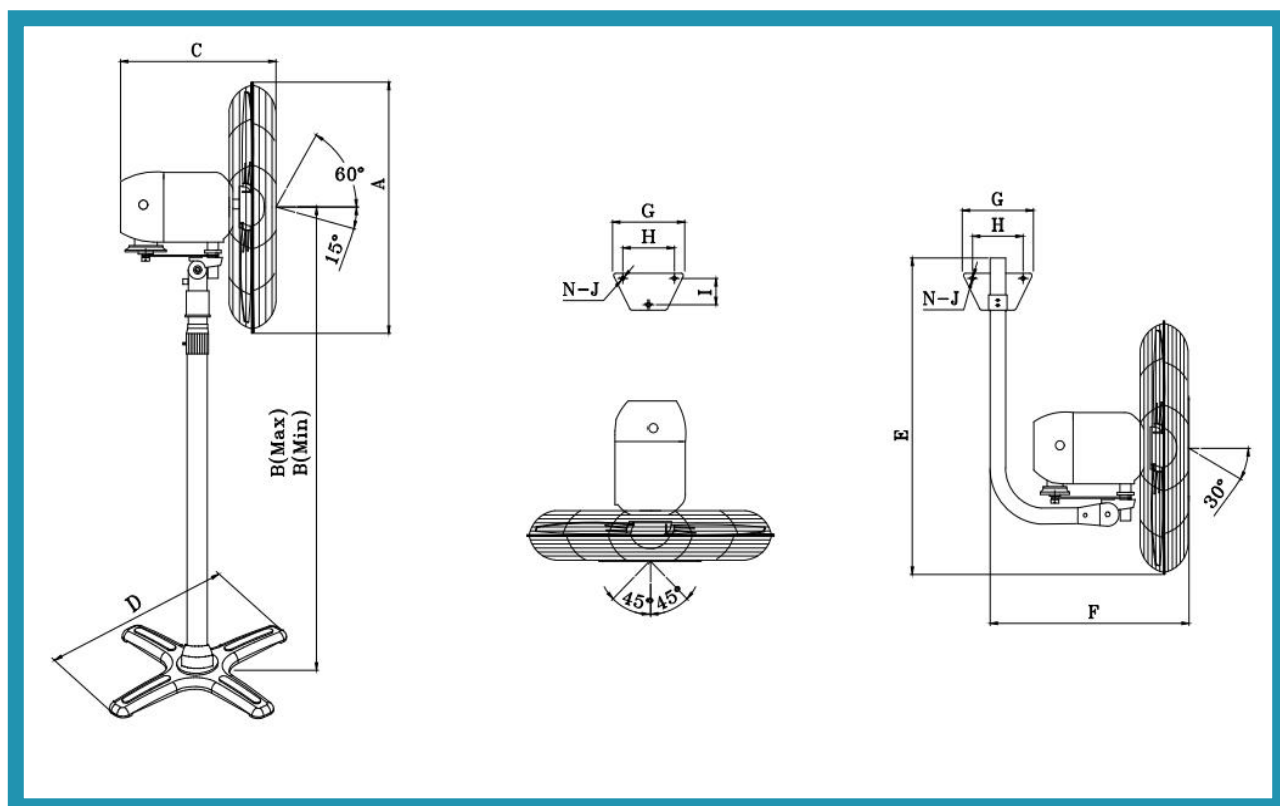

***Industrial ventilation requires
20 air changes per hour**